

t r a c k s i d e


MARK-2 TELEPHONE STUMP BOX



The Cannon Mark-2 Telephone Stump Box is of a traditional single-skinned proven design that continues to be a product of choice in a buoyant renewals market. This enclosure is normally used for terminating/connecting telecommunication cables fed to it through ducts in the concrete pad to which it is bolted. It can be supplied fitted with a Krone A100 or A200 copper termination box, together with a galvanised steel support framework and associated cable management brackets, or it can be customised to accept other equipment.

The cabinet is of extremely rugged welded design, with the central body being made from powder coated 3mm thick galvanised steel. Standard locking for railway use utilises a Yale lock with a 221 key for deadlocking the cast stainless steel Cannon swing handle. Other deadlocks can be fitted to customer requirements.

**Please contact the
Sales Team for further
information on:
+44(0)1425 638148 or
sales@cannontech.co.uk**

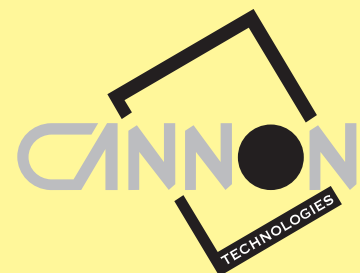

PRODUCT FEATURES

- IP 45 rating
- IP rating can be increased to IP55 by incorporating Krone A100 or A200 copper termination boxes
- Natural ventilation for internal cooling
- Single fully removable lift-off front cover
- Internal fitments to customers' requirements
- Modular building techniques allow for customer design contribution
- Cover secured with stainless steel dead locking system
- Standard colour is grey but can be painted to customers specific colour requirement
- Multi-stage cleaning and pre-treatment prior to the application of a 90 micron powder coating
- Manufactured from heavy gauge galvanized material giving a 25-year life expectancy
- Can be supplied with various mounting system
- Installed using a pre-cast concrete "Direct Bury" in-ground root systems
- Includes many anti-vandal features within the construction
- As an optional extra the inside can be insulated to prevent the formation of condensation
- Used in Rail side applications for copper termination and cable jointing

